FITMENT INSTRUCTIONS





CANOPY CAMPER TO SUIT FORD RANGER FITMENT INSTRUCTION

All rights reserved. No part of this document may be reproduced, translated, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without prior written permission of the owner.


Review all instructions information carefully before installation.

Any damages, direct or incidental to the installer and/or property due to incorrect installation of any parts are the responsibility of the installer. Due to the various applications and fitment options available, the responsibility lies with the user to ensure all mounting points are secure and tight before every trip. If unsure, consult with your Distributor regarding the operations of our products.

Users are advised to be mindful of the load they are carrying and drive in accordance with road conditions.




1. Fit the supplied Ford Canopy mounting brackets to existing holes In load bin as shown. See Ford Canopy fitment instruction below.

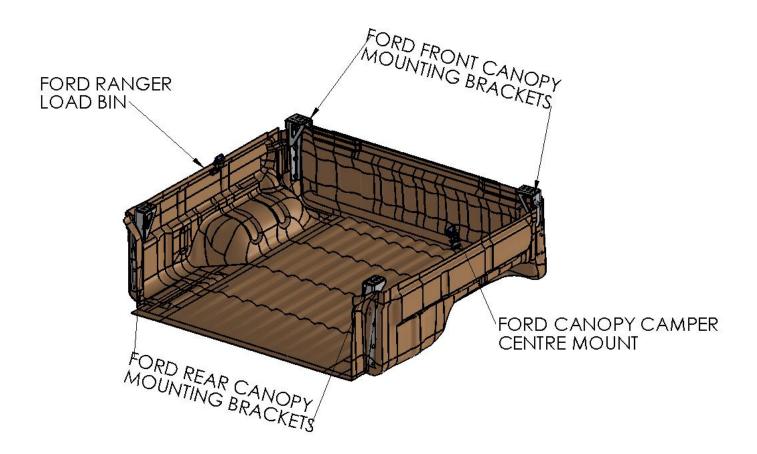




WARNING


DOUBLE CAB

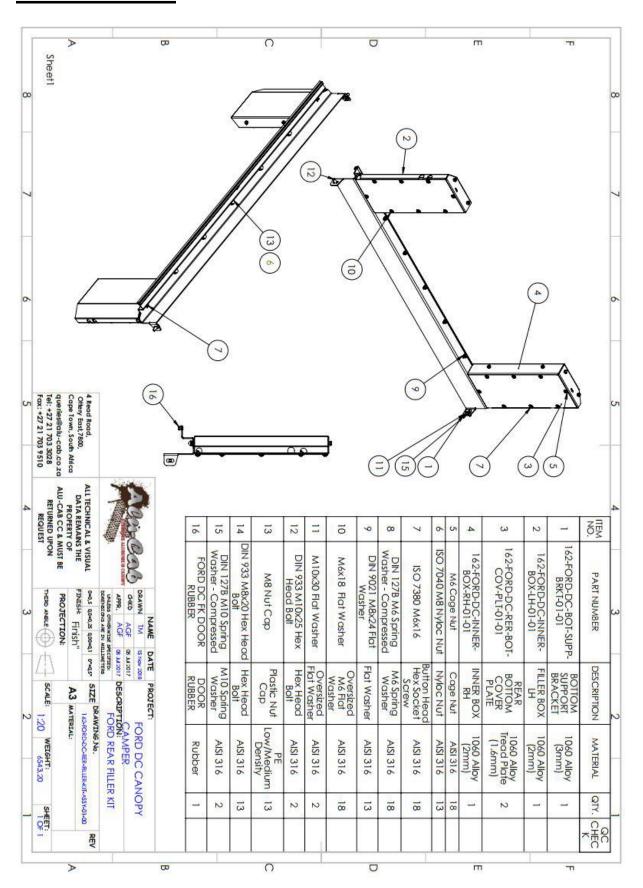


EXTRA CAB

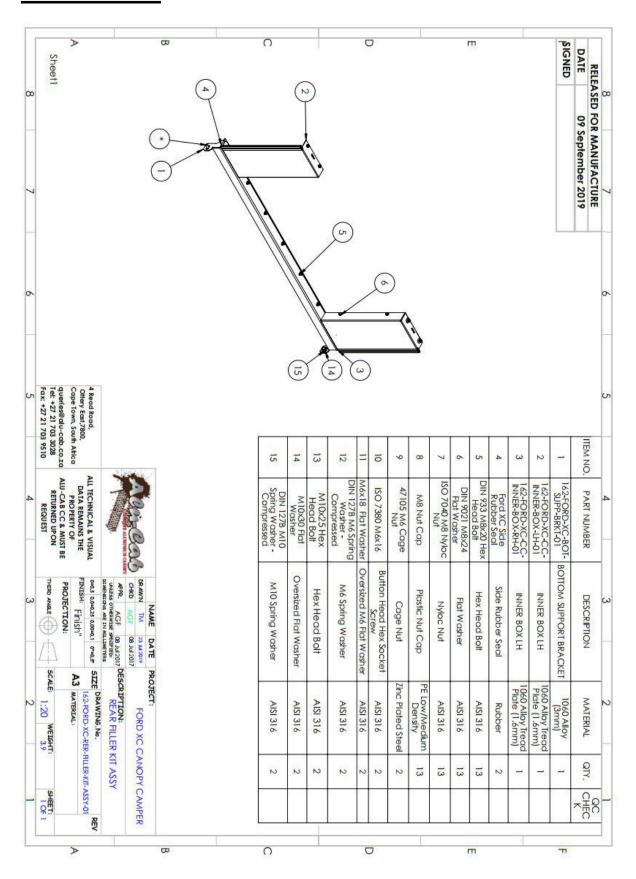

1.Rear filler panel assembly.

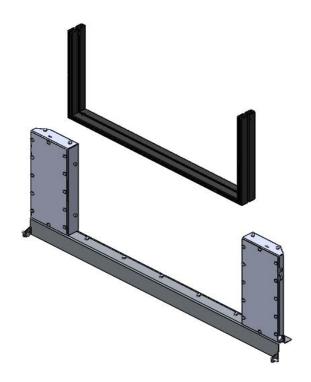


1.1 Fit lower door frame to filler panel assembly as shown.

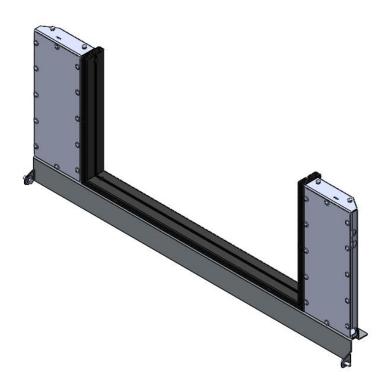

1. Mount filler panel assembly to load bin as shown.




1.1. Then mount canopy camper base unit on top of load bin.

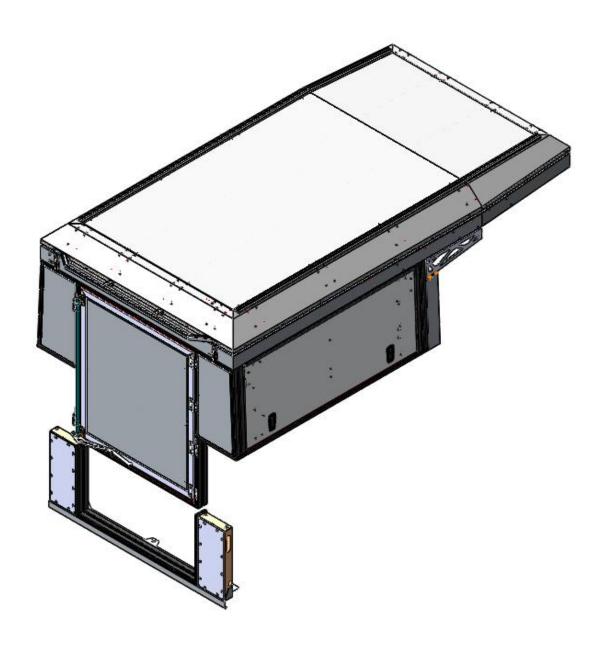


2. Connect rear filler panel assembly and base unit as shown.


OUTER MOUNTING ON BOTH JOINTS

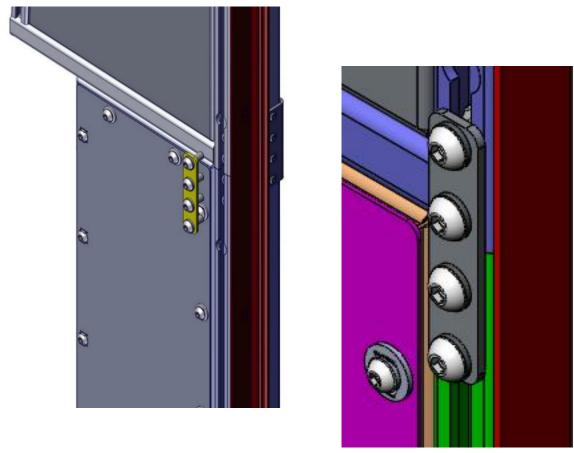


INNER MOUNTING ON BOTH JOINTS

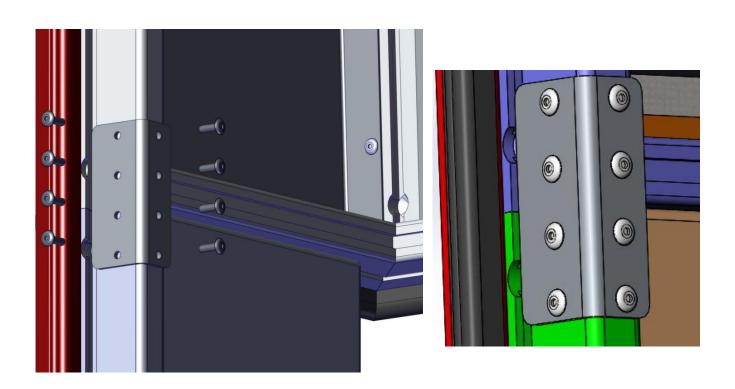


6.Fit rear door rebate with Ø4.8 x15 sealed countersink rivets as shown.

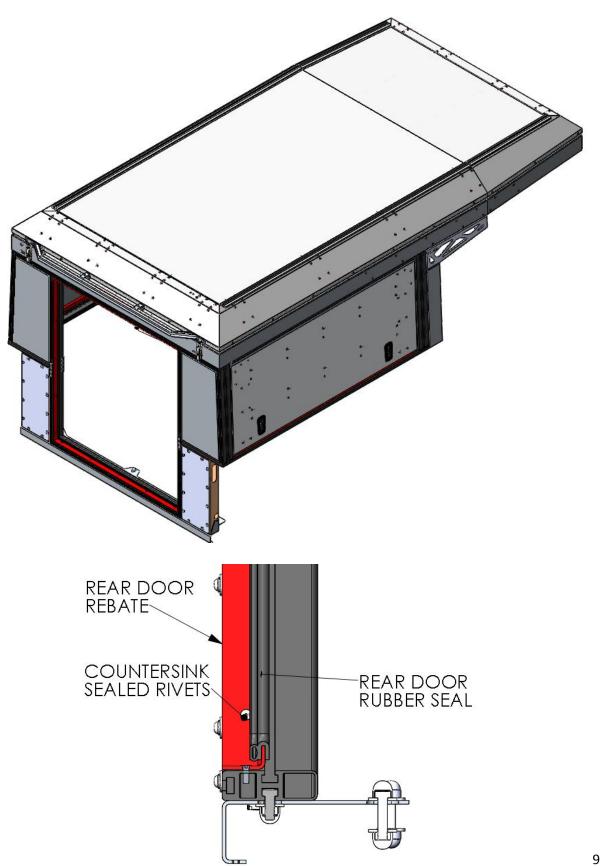

3. Fit rear door by mounting 4 x Butt hinges to camper frame as shown. Centre rear door, top to bottom and the hinge centres left to right. Also mount the door lock to the camper frame.

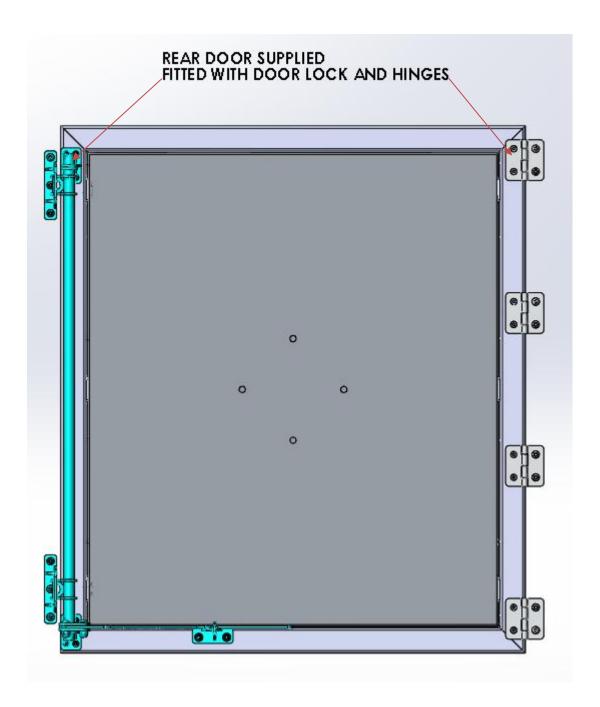

4. Attach hinges and lock to camper frame.

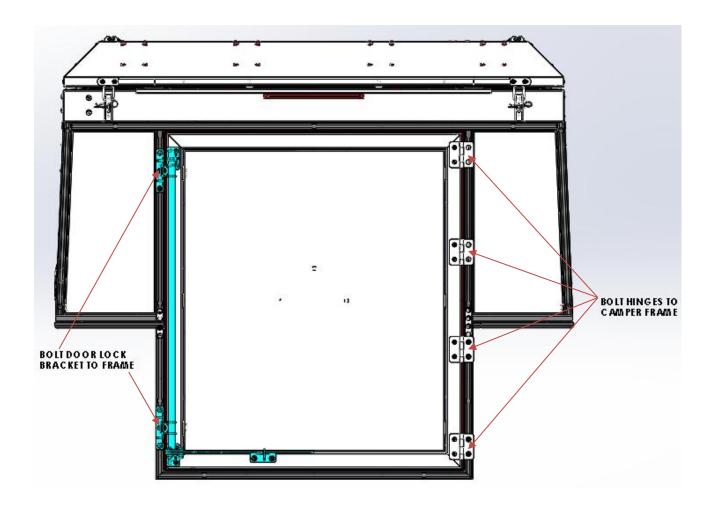

1. Canopy Fitment - Tools, Fasteners & Materials

The tables below show the equipment, i.e. tools and fasteners required to start the canopy fitment for a Ford Ranger.

1.1. <u>Tools Required:</u>

	TOOL
•	Ratchet
•	T-40 Spline Socket
•	13mm Socket
•	13mm Ring Flat Spanner

1.2. Fasteners required: (Included with canopy)

<u>ITEM</u>	<u>QUANTITY</u>
M8x30mm Hex Bolts	8 off
M8x20mm Hex Bolts	12 off
M8x25mm Hex Bolts	4 off
M8x40mm Hex Bolts	2 off
M8 Flat Washer	20 off
M8 Split Washer	12 off
M8 Nylock Nuts	18 off
M8 Plastic Nut Caps	18 off

1.3. <u>Hardware Required:</u>

<u>ITEM</u>	<u>PURPOSE</u>
Left Front Support Brackets	1 off
Right Front Support Bracket	1 off
Left Rear Support Bracket	1 off
Right Rear Support Bracket	1 off
Universal Bracket	4 off
Centre Mounting Bracket	2 off

1.4. Consumables Required:

<u>ITEM</u>			
•	Turpentine		
•	Cloth		
•	Black sealant, silicone or Sikaflex		
•	Window Cleaner		

2. Front and Rear Canopy Support Brackets.

In Figure 1 and Figure 2 below are the canopy support brackets for the Ford T6/T7 Ranger.

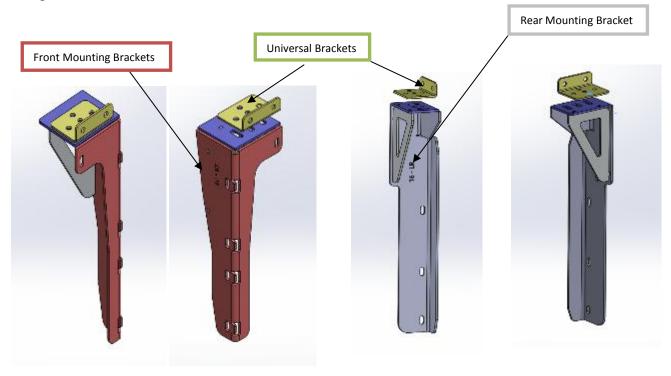


Figure 1: Front Support Canopy Brackets

Figure 2: Rear Support Canopy Brackets

Mounting the Support Brackets to the Load Bin

a) Step 1 – Removing the Standard Hooks

Remove the standard hooks using a T40 spline socket and ratchet.

Standard Hook Points



Figure 3: Standard Hook Points

Figure 4: Standard Hook

b) Step 2 - Bolting the Front and Rear Mounting Brackets to the Load Bin

Figures 5 to Figure 10 shows where and how the support brackets are fixed to the load bin. The top of the brackets must be flush with the load bin.

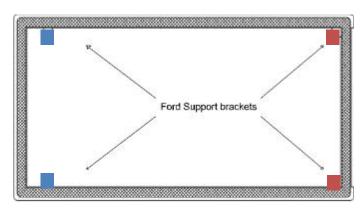


Figure 5: Top View of Load Bin




Figure 6: Side View of Load Bin




Figure 7: Rear Canopy Support Bracket Position

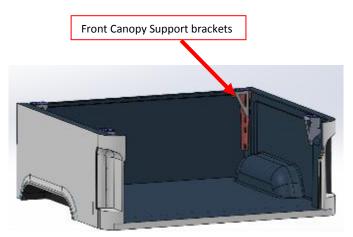


Figure 8: Front Canopy Support Bracket Position

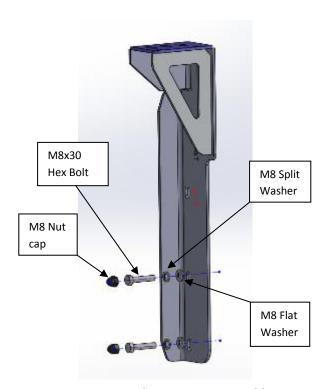


Figure 9: Rear Bracket Mounting Assembly


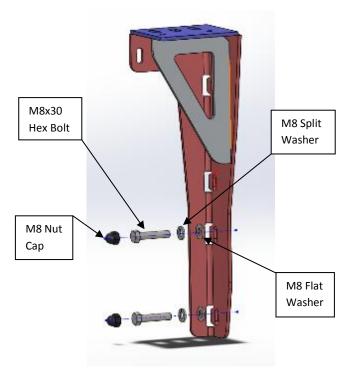


Figure 10: Front Bracket Mounting Assembly

3. Centre Mounting Bracket

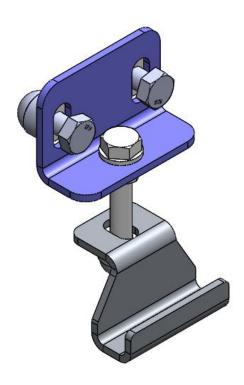

ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	QTY.
Ĩ	CMB-000-002	BOTTOM CLAMP BRACKET	AIS1304 (3mm)	1
2	212-MNT-BRKT-02-00	MOUNTING BRACKET 2	AI\$1304	1
3	M8x50 Hex Head Bolt	Hex Head Bolt	AISI 316	1
4	DIN 933 M8x20 Hex Head Bolt	Hex Head Bolt	AISI 31 6	2
5	DIN 125 M8 Flat Washer	Flat Washer	AISI 31 6	5
6	DIN 985 M8 Nyloc Nut	Nyloc Nut	AISI 316	3
7	M8 Nut Cap	Plastic Nut Cap	PE Low/Medium Density	3
8	M8 Hex Head Nut	Hex Head Nut	AISI 316	1

3.1. Mounting the Centre Mounting Bracket

In Figure 15 below shows how the centre mounting bracket clamps onto the load bin.


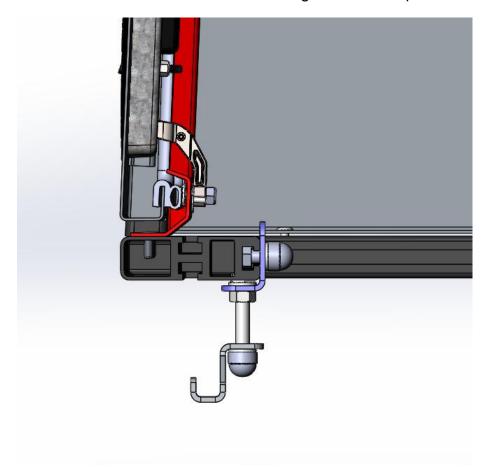


Figure 15: Section View of Clamping Method

4. Canopy Installation

Before placing the canopy onto the load bin, check that the D-Rubber is intact on the canopy. If this is not done, the canopy and/or load bin could be damaged or can cause leaks into the canopy.

To position the canopy, ensure that it is flush with the load bin.

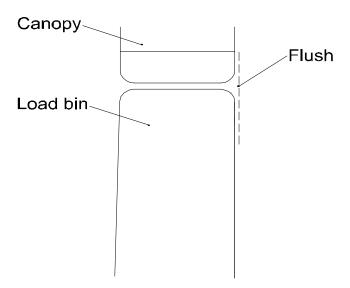

4.1. Canopy Fitment to Load bin

Figure 16: Canopy and Load Bin Alignment

Open all the doors of the canopy and place onto the load bin.

a) <u>Step 1 – Bolting the Universal Bracket to the Support Bracket.</u>

In Figure 17 and Figure 18 below shows how the universal bracket is mounted to the front and rear support brackets.

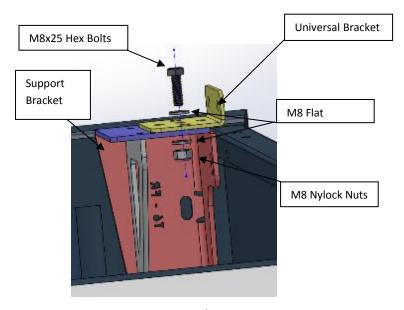


Figure 17: Universal-Front Bracket Mounting Assembly




Figure 18: Universal-Rear Bracket
Mounting Assembly

b) Step 2 - Bolting the Universal Bracket to the Canopy

When the Universal bracket is bolted to the mounting brackets, it should then be mounted to the canopy. In Figure 19 and Figure 20 shows the fastener assembly.

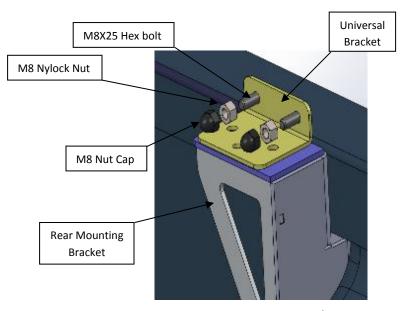


Figure 19: Rear Universal to Canopy Mounting assembly




Figure 21: Tightening Universal bracket to Canopy

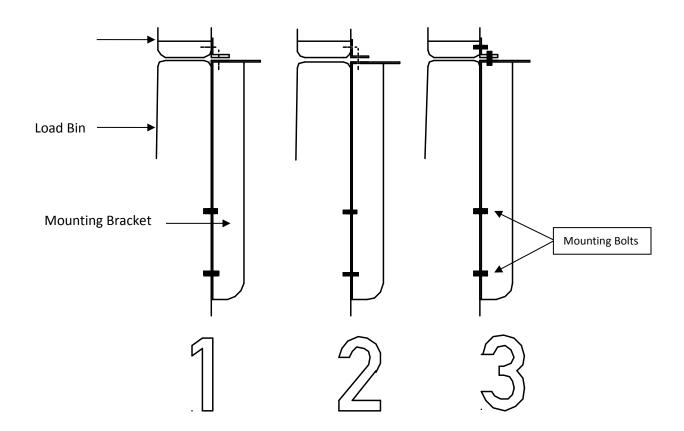


Figure 22: Overall Fitting Assembly

NB! The Canopy Camper must rest solely on the mounting brackets and no load is allowed on the load bin. Once this is completed, the Canopy Camper has been installed successfully.